

High-Performance Acoustical Underlayment & Moisture Barrier

floormuffler™

*For Laminate, Engineered,
and Solid Hardwood
Floor Systems.*

FloorMuffler™ Simply Outperforms

- Dramatically reduces foot traffic noise
- IIC 72/STC 73
- Moisture Vapor Barrier-No additional film required
- Suitable for use over concrete and wood sub-floors
- Ideal for radiant heat flooring
- State of the art technology produces the lightest weight, high performance product
- Exceeds Uniform Building Code (UBC) requirements
- Mold and mildew resistant as well as non-allergenic
- For commercial and residential installations
- Warranted for all floating floor applications
- For use with FloorMuffler HPA warranted glue down system

We keep things quiet so you don't have to!


www.floormuffler.com

DIVERSIFIED
Foam Products, Inc.
ISO9001:2000 certified

Questions? Call 800-440-6008



Complete installation instructions and warranty on back.

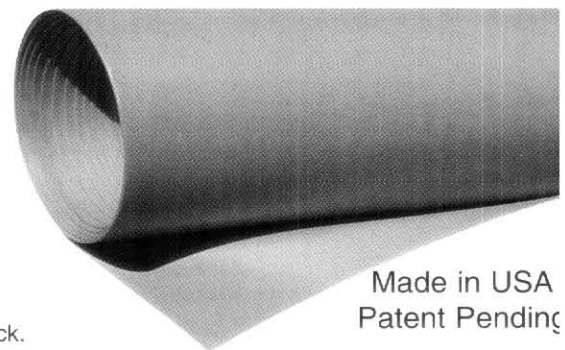

Made in USA
Patent Pending

FLOORMUFFLER™ INSTALLATION INSTRUCTIONS

- Step 1: Make sure subfloor is free of dust and debris. Check for protruding nails and/or defects in the subfloor.
- Step 2: Install one roll of the underlayment parallel to the wall and in the opposite direction as you plan to install the flooring planks. Cut the underlayment with a utility knife leaving at least 2" going up the wall. Install the planks, but be sure that you are still able to see the edges of the underlayment so that you can properly line up the next roll.
- Step 3: Install the next roll of underlayment, butting the seams together. If installing the underlayment on concrete, or below grade subfloors, be sure to tape the seams together with 2" tape that meets the moisture vapor transmission rate for this type of installation. If installing the underlayment on wood or organic subfloors, the seams do not need to be taped.
- Step 4: Continue to install the planks and underlayment, as in step 3. The final 2" of the underlayment will be covered by finish molding or trim if no molding will be installed.

FLOORMUFFLER™ WARRANTY-FLOATING FLOOR SYSTEMS

Diversified Foam Products, Inc. warrants FloorMuffler underlayment to be free from defects in manufacturing, materials, and workmanship in manufacture for a period of 15 years from the date the product was originally purchased (the Limited Warranty Period). In addition, Diversified Foam Products, Inc. also warrants its FloorMuffler underlayment against material breakdown, deterioration, or disintegration for a period of 15 years for the original resident or property owner. This warranty is non-transferable.

The floor must be rigid and structurally sound. Notification of failure must be within 30 days. Diversified Foam Products, Inc. reserves the right to inspect installation. Diversified Foam Products, Inc. will replace all damaged areas of primary flooring that are proven to result from failure of our underlayment to remain resilient and functional. Replacement is limited to that of FloorMuffler underlayment sheeting, reasonable cost of the damaged flooring, and reasonable labor costs.

Diversified Foam Products, Inc. will not assume liability for damage or failure of primary and secondary flooring caused by any type of surface liquid spills, accidental human and pet spills of any type that may cause harm to the primary and secondary flooring products, broken pipes, hoses, rain water, etc., improper installation and installation supplies, defects caused by damage in transit or while in the possession of the purchaser due to abuse or misuse.

Satisfactory results depend not only on quality products, but also upon factors beyond our control. Therefore, this warranty only applies to the membrane itself and not to the manner of installation over which we have no control. There are no other warranties expressed or implied except those that are herein stated. Diversified Foam Products, Inc. shall have no other liability with respect hereto.

Diversified Foam Products, Inc. stands behind FloorMuffler and guarantees its performance under all brands of laminate and floating wood floors. Should any manufacturer of these types of floors fail to honor their warranty due to the installation of FloorMuffler rather than their brand of underlayment, we will agree to honor their original warranty in full should FloorMuffler fail in anyway.

*For FloorMuffler HPA system Limited Lifetime Warranty, visit our web site @ www.floormuffler.com.

REV 080805